

## NBEM-1-11.0-XXP

栅栏式接线端子

额定电流: 20 A

额定电压: 300 V


间距: 11.0 mm

使用线径: 22~12AWG

极数: 3P

安装: 波峰焊

### 尺寸图

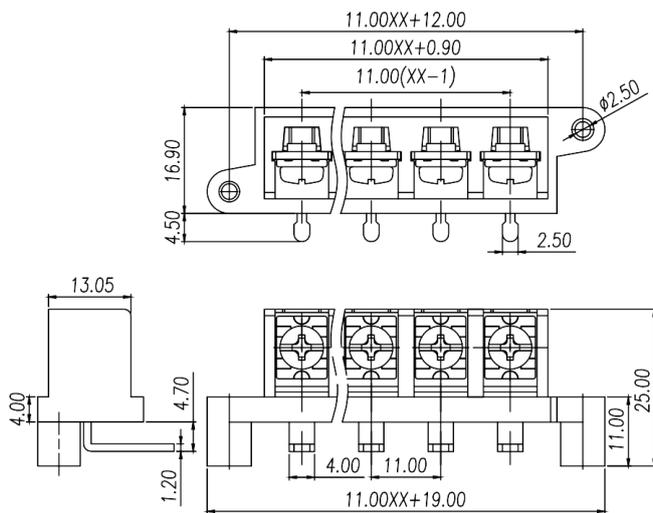

仅供参考，实际规格依产品工程图为准 版本2.0



## 材质及电镀 Material

螺丝 Screws M3.0 Steel Ni plated

焊脚 Pin Header Copper alloy , Sn plated

塑件 Housing PA66 , UL94V-0

## 电气性能 Electrical

参考标准 Standard	UL	IEC
额定电压 Rated voltage	300V	450V
额定电流 Rated current	20A	32A
使用线径 Wire range	22~12AWG	4mm <sup>2</sup>
接触电阻 Contact Resistance	20m	
绝缘电阻 Insulation resistance	500M /DC500V	
耐电压 Withstanding voltage	AC2000V/1Min	

## 一般参数 Other Data

间距 Pitch 11.0mm

极数 Poles 3P

工作温度 Operating temperature -40 ~+105

扭矩 Torque 12.24kgf-cm/1.2Nm/10.6Lbin

---

**商业数据**

---

产品型号

NBEM-1-11.0-XXP

产品编号

-

包装方式

内袋

内盒

外箱

宁波佳绩机电科技有限公司  
佳绩电子科技（宁波）有限公司

地址：宁波市海曙区高桥镇新港路8号

邮编：315000

总机：+86 574-55665696

传真：+86 574-55842261

邮箱：shangwu@nbjiaji.com

Ningbo jiaji Electronics Co.,Ltd  
Address: No. 8 Xingang Road, Gaoqiao Town,  
Haishu District, Ningbo City, Zhejiang Province  
Zip code: 315000  
Switchboard: +86 574-55665696  
Fax: +86 574-55842261  
E-mail: shangwu@nbjiaji.com